



MATERIAL:
AÇO CARBONO
ROSCA:
UNC - ASME B1.1 • BSW - DIN 11

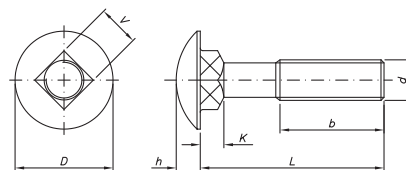


TABELA DE DIMENSÕES (MM)

d (diâmetro)	3/16	1/4	5/16	3/8	7/16	1/2	5/8	3/4
rosca/FPP	BSW-24	UNC-20	UNC-18	UNC-16	UNC-14	BSW-12	UNC-11	UNC-10
h (altura cabeça) máx.	2,89	3,68	4,47	5,28	6,07	6,85	8,73	10,31
D (diâmetro cabeça) máx.	11,91	15,08	18,26	21,43	24,61	27,78	34,13	40,48
K (altura do quadrado) máx.	3,17	3,96	4,74	5,56	6,35	7,13	8,73	10,31
v (largura do quadrado) máx.	5,05	6,60	8,22	9,85	11,48	13,08	16,30	19,50
b (comp. rosca) ref.	Se L <= 2" rosca inteira Se L > 2", 50 mm mín.							

Diâmetro ► Comprimento ▼	3/16 BSW-24	1/4 UNC-20	5/16 UNC-18	3/8 UNC-16	7/16 UNC-14	1/2 BSW-12	5/8 UNC-11	3/4 UNC-10
3/4	●	●	●	●				
1	●	●	●	●				
1-1/4	●	●	●	●				
1-1/2	●	●	●	●	●	●		
1-3/4	●	●	●	●	●	●		
2	●	●	●	●	●	●	●	●
2-1/4		●	●	●	●	●	●	●
2-1/2		●	●	●	●	●	●	●
2-3/4		●	●	●	●	●	●	●
3		●	●	●	●	●	●	●
3-1/4		●	●	●	●	●	●	●
3-1/2		●	●	●	●	●	●	●
4		●	●	●	●	●	●	●
4-1/2		●	●	●	●	●	●	●
5		●	●	●	●	●	●	●
5-1/2		●	●	●	●	●	●	●
6		●	●	●	●	●	●	●
6-1/2			●	●	●	●	●	●
7			●	●	●	●	●	●
7-1/2			●	●	●	●	●	●
8			●	●	●	●	●	●
8-1/2			●	●	●	●	●	●
9			●	●	●	●	●	●
9-1/2			●	●	●	●	●	●
10			●	●	●	●	●	●
11			●	●	●	●	●	●
12			●	●	●	●	●	●
13			●	●	●	●	●	●
14			●	●	●	●	●	●
15				●	●	●	●	●
16				●	●	●	●	●