


PORCA SEXTAVADA



MATERIAL:
 AÇO INOXIDÁVEL - 316
 ROSCA:
 UNC - ASME B1.1 • BSW - DIN 11 - MA - DIN 13 (ISO 965)

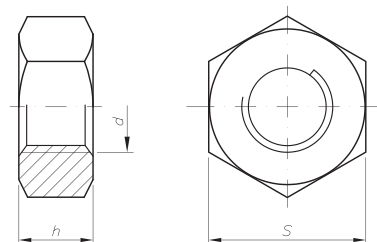

PORCA SEXTAVADA • ASME B18.2.2

d (diâmetro)	rosca/FPP	h (Altura) máx.	s (Chave) máx.		
			pol.	mm	
#10	UNC-24	4,20	3/8	9,52	●
1/4	UNC-20	5,74	7/16	11,11	●
5/16	UNC-18	6,93	1/2	12,70	●
3/8	UNC-16	8,56	9/16	14,27	●
7/16	UNC-14	9,78	11/16	17,46	●
1/2	UNC-13	11,38	3/4	19,05	●
1/2	BSW-12	11,38	3/4	19,05	●
9/16	UNC-12	12,60	7/8	22,22	●
5/8	UNC-11	14,20	15/16	23,81	●
3/4	UNC-10	16,89	1-1/8	28,57	●
7/8	UNC-9	19,71	1-5/16	33,33	●
1	UNC-8	22,53	1-1/2	38,10	●
1-1/8	UNC-7	25,37	1-11/16	42,86	●
1-1/4	UNC-7	27,78	1-7/8	47,62	●
1-3/8	UNC-6	30,63	2-1/16	52,38	●
1-1/2	UNC-6	33,45	2-1/4	57,15	●
1-3/4	UNC-5	39,01	2-5/8	66,67	●
2	UNC-4-1/2	44,67	3	76,20	●

PORCA SEXTAVADA • DIN 934

d (diâmetro)	rosca/ passo	h (Altura) nom.	s (Chave) máx.	
M3	MA-0,50	2,40	5,5	●
M4	MA-0,70	3,20	7	●
M5	MA-0,80	4,00	8	●
M6	MA-1,00	5,00	10	●
M8	MA-1,25	6,50	13	●
M10	MA-1,50	8,00	17	●
M12	MA-1,75	10,00	19	●
M14	MA-2,00	11,00	22	●
M16	MA-2,00	13,00	24	●
M18	MA-2,50	15,00	27	●
M20	MA-2,50	16,00	30	●
M22	MA-2,50	18,00	32	●
M24	MA-3,00	19,00	36	●
M27	MA-3,00	22,00	41	●
M30	MA-3,50	24,00	46	●
M33	MA-3,50	26,00	50	●
M36	MA-4,00	29,00	55	●
M39	MA-4,00	31,00	60	●
M42	MA-4,50	34,00	65	●
M45	MA-4,50	36,00	70	●
M48	MA-5,00	38,00	75	●
M52	MA-5,00	42,00	80	●