


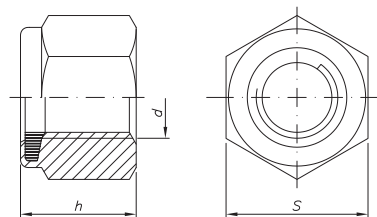

MATERIAL:
 AÇO CARBONO - GRUA 2 (NE2)
 ROSCA:
 UNC / UNF / UNS - ASME B1.1 - BSW - DIN 11


TABELA DE DIMENSÕES (MM)
PORCA TRAVANTE ALTA COM NYLON - UNC - GRAU 2

d (diâmetro)	rosca/FPP	h (Altura) máx.	s (Chave) máx.		
			pol.	mm	
#4	UNC-40	3,88	1/4	6,35	●
#5	UNC-40	3,88	1/4	6,35	●
#6	UNC-32	4,77	5/16	7,93	●
#8	UNC-32	6,07	11/32	8,73	●
#10	UNC-24	6,32	3/8	9,52	●
1/4	UNC-20	8,33	7/16	11,11	●
5/16	UNC-18	9,11	1/2	12,70	●
3/8	UNC-16	11,88	9/16	14,27	●
7/16	UNC-14	11,88	5/8	15,87	●
1/2	UNC-13	15,46	3/4	19,05	●
1/2	BSW-12	15,46	3/4	19,05	●
9/16	UNC-12	16,66	7/8	22,22	●
5/8	UNC-11	19,43	15/16	23,81	●
3/4	UNC-10	22,60	1-1/16	26,98	●
7/8	UNC-9	25,37	1-1/4	31,75	●
1	UNC-8	27,38	1-7/16	36,51	●
1-1/8	UNC-7	30,55	1-5/8	41,27	●
1-1/4	UNC-7	36,11	1-13/16	46,03	●
1-1/2	UNC-6	41,65	2-3/16	55,56	●

PORCA TRAVANTE ALTA COM NYLON - UNF - GRAU 2

d (diâmetro)	rosca/FPP	h (Altura) máx.	s (Chave) máx.		
			pol.	mm	
#10	UNF-32	6,32	3/8	9,52	●
1/4	UNF-28	8,33	7/16	11,11	●
5/16	UNF-24	9,11	1/2	12,7	●
3/8	UNF-24	11,88	9/16	14,27	●
7/16	UNF-20	11,88	5/8	15,87	●
1/2	UNF-20	15,46	3/4	19,05	●
9/16	UNF-18	16,66	7/8	22,22	●
5/8	UNF-18	19,43	15/16	23,81	●
3/4	UNF-16	22,60	1-1/16	26,98	●
7/8	UNF-14	25,37	1-1/4	31,75	●
1	UNS-14	27,38	1-7/16	36,51	●
1	UNF-12	27,38	1-7/16	36,51	●

APLICAÇÃO:

PARA MONTAGENS DE JUNTAS FIXADAS SUJEITAS A VIBRAÇÕES, OSCILAÇÕES, ENVELHECIMENTO NATURAL, ETC.