

PORCA TRAVANTE COM NYLON



MATERIAL:
 AÇO INOXIDÁVEL - 304
 ROSCA:
 UNC - ASME B1.1 - BSW - DIN 11 • MA DIN 13 (ISO 965)

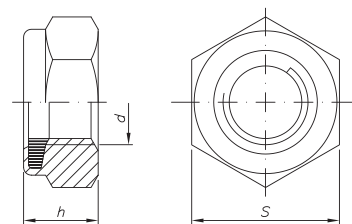


TABELA DE DIMENSÕES (MM)
PORCA TRAVANTE COM NYLON • IFI 100

d (diâmetro)	rosca/FPP	h (Altura) máx.	s (Chave) máx.		
			pol.	mm	
#4	UNC-40	4,14	1/4	6,35	●
#5	UNC-40	4,14	1/4	6,35	●
#6	UNC-32	4,77	5/16	7,92	●
#8	UNC-32	6,07	11/32	8,73	●
#10	UNC-24	6,32	3/8	9,52	●
1/4	UNC-20	8,33	7/16	11,11	●
5/16	UNC-18	9,11	1/2	12,70	●
3/8	UNC-16	11,91	9/16	14,27	●
7/16	UNC-14	13,30	11/16	17,46	●
1/2	UNC-13	15,46	3/4	19,05	●
1/2	BSW-12	15,46	3/4	19,05	●
9/16	UNC-12	16,66	7/8	22,22	●
5/8	UNC-11	19,43	15/16	23,81	●
3/4	UNC-10	22,60	1-1/8	28,57	●
7/8	UNC-9	25,37	1-5/16	33,33	●
1	UNC-8	28,54	1-1/2	38,10	●

PORCA TRAVANTE COM NYLON • DIN 985

d (diâmetro)	rosca/ passo	h (Altura) nom.	s (Chave) máx.	
M3	MA-0,50	4,00	5,5	●
M4	MA-0,70	5,00	7	●
M5	MA-0,80	5,00	8	●
M6	MA-1,00	6,00	10	●
M8	MA-1,25	8,00	13	●
M10	MA-1,50	10,00	17	●
M12	MA-1,75	12,00	19	●
M14	MA-2,00	14,00	22	●
M16	MA-2,00	16,00	24	●
M18	MA-2,50	18,50	27	●
M20	MA-2,50	20,00	30	●
M22	MA-2,50	22,00	32	●
M24	MA-3,00	24,00	36	●