


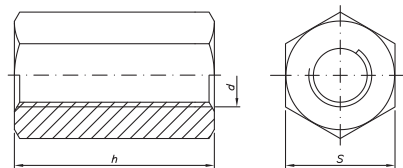

MATERIAL:
 AÇO INOXIDÁVEL - 304
 ROSCA:
 UNC - ASME B1.1 • DIN 13 (ISO 965)


TABELA DE DIMENSÕES (MM)
LINHA POLEGADA • IFI 128

d (diâmetro)	rosca/FPP	h (Altura) máx.	s (Chave) máx.		
			pol.	mm	
1/4	UNC-20	19,30	3/8	9,52	●
5/16	UNC-18	24,13	1/2	12,70	●
3/8	UNC-16	28,70	9/16	14,27	●
1/2	UNC-13	38,35	3/4	19,05	●
1/2	BSW-12	38,35	3/4	19,05	●
5/8	UNC-11	48,00	15/16	23,81	●
3/4	UNC-10	57,65	1-1/8	28,57	●

LINHA MÉTRICA • SOB CONSULTA

d (diâmetro)	rosca/ passo	h (Altura) nom.	s (Chave) máx.	
M6	MA-1,00	18,00	10	●
M8	MA-1,25	30,00	13	●
M10	MA-1,50	30,00	17	●
M12	MA-1,75	40,00	19	●
M16	MA-2,00	50,00	24	●
M20	MA-2,50	50,00	30	●